


# reqT

## Status promotion levels

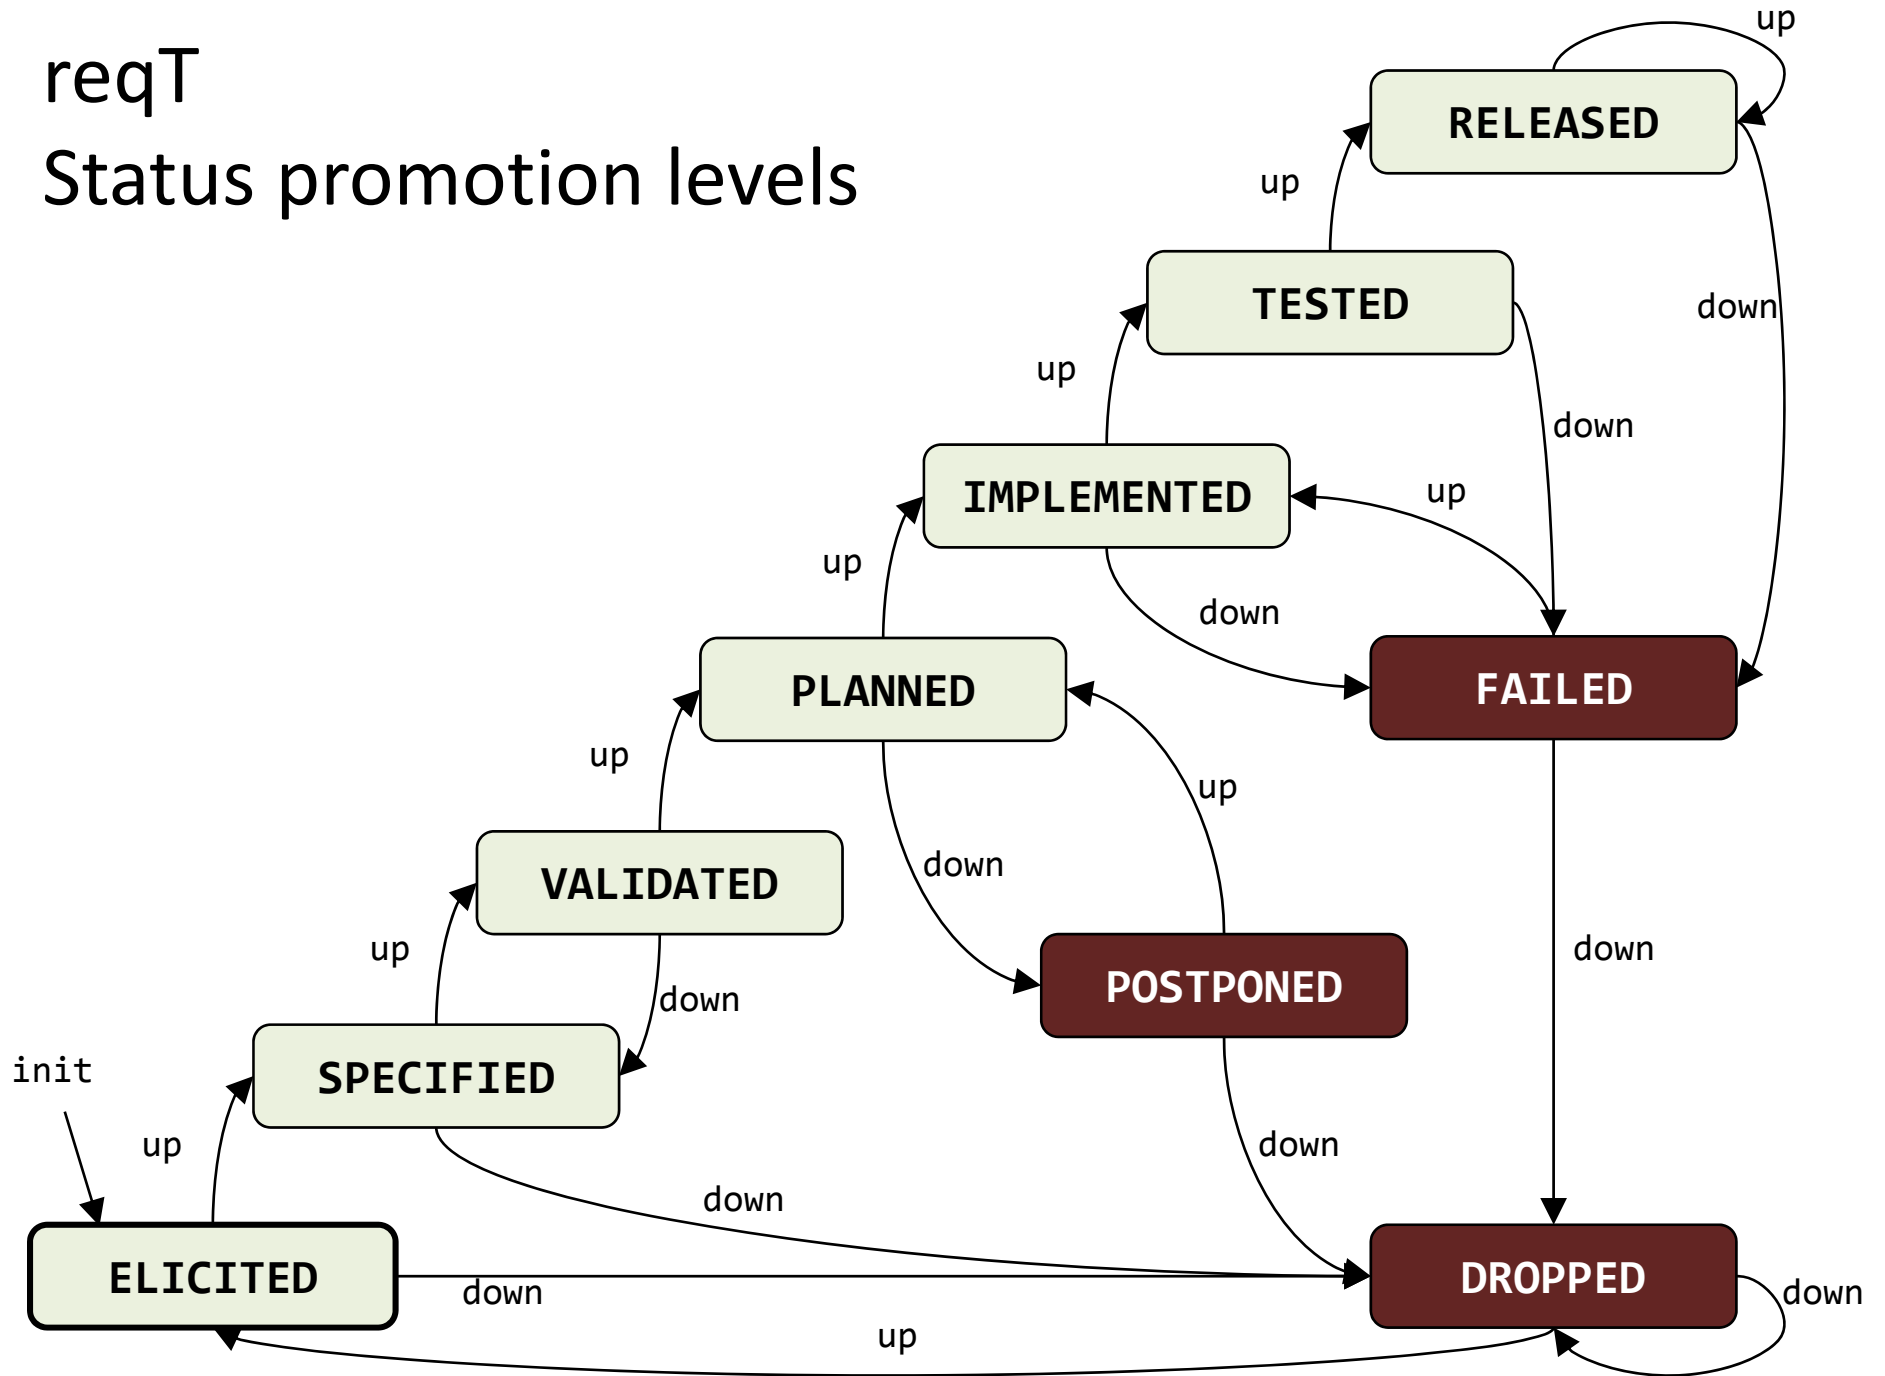

# Status(value: Level)

```
scala> val s = Status.init  
s: reqT.Status = Status(ELICITED)
```

```
scala> s.up  
res1: reqT.Status = Status(SPECIFIED)
```

```
scala> s.down  
res2: reqT.Status = Status(DROPPED)
```

